

Rockfon® CleanSpace Pure



Rockfon® CleanSpace Pure





- Rockfon CleanSpace Pure is a smooth, deep-matt, pure white cleanable ceiling tile with good acoustic properties. Applicable in various room types with cleanability requirements. The product is long-lasting and withstands numerous cleaning and disinfection methods
- Full range of dimensions and edges for complete design freedom
- High sound absorption (Class A) and highest fire safety (Class A1)
- Low particle emission: ISO Class 3

Product Description

- Stone wool tile
- Visible side: smooth, deep-matt and super-white painted fleece
- Rear side: back fleece
- Durable painted edges

Application Areas

- Healthcare
- Education
- Leisure
- Retail

Edges	Module size (mm)	Weight (kg/m ²)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
	600 x 600 x 20	2.3	Rockfon® System CleanSpace T24 A, E	38%	Bronze	2.25	2.84
	1200 x 600 x 20		Rockfon® System CleanSpace T24 A, E				
	600 x 600 x 40	4.1	Rockfon® System CleanSpace T24 A, E			3.85	4.99
	1200 x 600 x 40		Rockfon® System CleanSpace T24 A, E				
	600 x 600 x 20	2.8	Rockfon® System CleanSpace T24 A, E	38%	Bronze	2.96	3.74
	1200 x 600 x 20		Rockfon® System CleanSpace T24 A, E				
	600 x 600 x 22	3.7	Rockfon® System T24 X	38%	Bronze	3.23	4.34
	1200 x 600 x 22		Rockfon® System T24 X				


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1.00 (Class A)

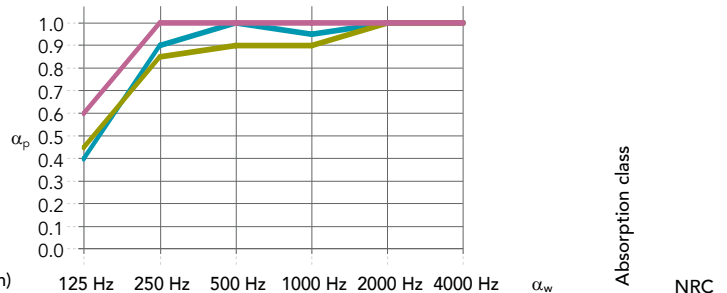

Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A,E: 20 / 200	0.40	0.90	1.00	0.95	1.00	1.00	1.00	A	0.95
X: 22 / 200	0.45	0.85	0.90	0.90	1.00	1.00	0.95	A	0.95
A: 40 / 200	0.60	1.00	1.00	1.00	1.00	1.00	1.00	A	1.05



Reaction to fire
 A1



Light reflection
 86% light reflection
 >99% light diffusion



Visual appearance
 Super-white surface
 L value: 94.5
The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light
 Gloss: 0.8 gloss unit at 85° angle
The gloss of the product is tested in accordance with ISO 2813.



Humidity and sag resistance
 Representative products from Rockfon's portfolio have been tested to ASTM C367.
 No visible deflection in high humidity.
 Up to 100% RH.
 C/0N



Cleaning

- Vacuum
- Damp cloth
- High pressure cleaning (monthly and only applicable for A-edge installation). Max. 80 bar, min. 1 meter distance, water spread at 30° angle, max. water flow 360 L/h. The tiles should be clipped into the grid.
- Chemical resistance: Tested according to ISO 2812-3:2019 and classified in accordance with EN 12720. Rating on a scale from 1 to 5, where 5 is the best. We obtained 5 for the following detergents and disinfectants (weekly disinfection): Active chlorine 2,6%, quaternary ammonium 0,25%, hydrogen peroxide 5%, Ethanol 70% and Isopropanol 70%
- Use only soft equipment directly on the tile surface: cloth or sponge. Avoid scraping or stiff brush rubbing.



Disinfection

- Resistant to using Hydrogen Peroxide Vapor disinfection with impact on aeration time
- Can withstand and will not be affected by UVC and Ozone disinfection



Hygiene
 Stone wool provides no sustenance to microorganisms
 Microbiological class M1 fulfilling the requirements of Zone 4 (very high risk) defined by NF S 90-351:2013.
 Tested with:
 - Methicillin resistant staphylococcus aureus (MRSA)
 - Candida albicans
 - Aspergillus brasiliensis
 - E. Coli
 - Bacillus cereus
 M1 (zone 4) for the 5 tested pathogens.

The particle elimination kinetics class is conform to CP(0,5)5 according to the norm NF S 90-351:2013.



Surface durability
 Enhanced durability and dirt resistance.
 Wet-scrub resistance: Class 5

The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



Clean room
 ISO Class 3



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

06.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

