

# Rockfon® Humitec Baffle



# Rockfon® Humitec Baffle



- Flexible free-hanging acoustic solutions, perfect for humid or harsh indoor atmospheres or for areas that require regular cleaning
- Built to withstand humid and corrosive Class D environments
- Comes with a robust and durable frame that protects the panel edges from damages and ensures cleanliness
- Ideal for areas where frequent or unhindered access to services is required

## Product Description

- Panel: Micro-textured white painted, water repellent fleece
- Frame: White powder coated hot galvanised steel with the multi-functional clip that offers several mounting methods.

## Application Areas

- Healthcare
- Leisure
- Industry

Edges	Module size (mm)	Weight (kg/unit)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
<b>4F</b> 	1200 x 450 x 50	3.4	Rockfon® System Humitec Baffle	39%	Bronze	4.09	5.21
	1200 x 600 x 50	4.2	Rockfon® System Humitec Baffle				

Edge detail 4F = 4 Framed

\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/apac-epd](https://rockfon.link/apac-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




## Performance



### Sound absorption

$A_{eq}$  (m<sup>2</sup>/item)

C - center distance between baffles' rows,  
H - suspension height: net distance between baffle and the soffit

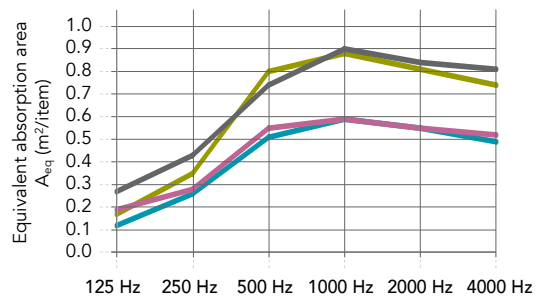

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1200x300x50 - Baffles in rows, C300, H300	0.12	0.26	0.51	0.59	0.55	0.49
1200x600x50 (4F) - Baffles in rows, C1200, H300	0.17	0.35	0.80	0.88	0.81	0.74
1200x600x50 (4F) - Baffles in rows, C600, H40	0.19	0.28	0.55	0.59	0.55	0.52
1200x600x50 (4F) - Baffles in rows, C1200, H40	0.27	0.43	0.74	0.90	0.84	0.81



### Reaction to fire

A2-s1,d0



### Light reflection

85%



- ### Cleaning
- Vacuum
  - Damp cloth
  - Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide
  - Steam cleaning (twice a year)
  - Low pressure foam cleaning
  - High pressure cleaning: Max. 80 bar, min. 1 meter distance, water spread at a 30° angle



### Hygiene

Stone wool provides no sustenance to microorganisms



### Surface durability

Enhanced durability and dirt resistance.



### Safety Against Failure

D/Pass (40°C, 95% RH)  
According to EN13964:2014



### Corrosion resistance

Class D (EN13964)



### Clean room

ISO Class 2



### Recyclability

Fully recyclable stone wool



### Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



### Material health

All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

# Sounds Beautiful

