

Rockfon® Industrial Baffle



Rockfon® Industrial Baffle



- Functional free-hanging acoustic solutions for noisy industrial environments
- Available in a natural, durable surface
- Ideal for areas where frequent or unhindered access to services is required
- Comes with a variety of quick and easy mounting options

Product Description

- Panel: Nuanced white fleece
- Frame: Hot galvanised steel with the multi-functional clip that offers several mounting methods.

Application Areas

- Industry

Edges	Module size (mm)	Weight (kg/unit)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
2F 	1200 x 450 x 50	2.6	Rockfon® System Industrial Baffle	39%	Silver	3.5	4.59
	1200 x 600 x 50	3.4	Rockfon® System Industrial Baffle				

Edge detail 2F = 2 Framed

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




Performance



Sound absorption
 A_{eq} (m²/item)

C - center distance between baffles' rows,
H - suspension height: net distance between baffle and the soffit

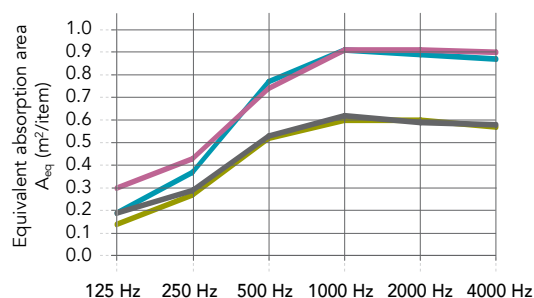

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
1200x600x50 (2F) - Baffles in rows, C1200, H300	0.19	0.37	0.77	0.91	0.89	0.87
1200x600x50 (2F) - Baffles in rows, C600, H300	0.14	0.27	0.52	0.60	0.60	0.57
1200x600x50 (2F) - Baffles in rows, C1200, H40	0.30	0.43	0.74	0.91	0.91	0.90
1200x600x50 (2F) - Baffles in rows, C600, H40	0.19	0.29	0.53	0.62	0.59	0.58



Reaction to fire
 A2-s1,d0



Light reflection
 64%



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Safety Against Failure
 B/Pass
 According to EN13964:2014



Corrosion resistance
 Class B (EN13964)



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

Sounds Beautiful

