

DATASHEET

Rockfon Color-all® Special



Sounds Beautiful

Rockfon Color-all® Special









- Innovative and aesthetically pleasing smooth, matt surface with an unlimited custom colour range using NCS
- Rockfon Color-all Special is available in exposed, semi-concealed and concealed edges in a large variety of module sizes, allowing for unique design freedom to inspire and enhance your interior design scheme

Product Description

- Stone wool tile
- Visible side: smooth coloured, matt fleece
- Rear side: back fleece

Application Areas

- Industry
- Office
- Leisure
- Retail
- Education
- Healthcare

Edge detail	Module size (mm)	Approximate weight (kg/m ²)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A15	600 x 600 x 20	3.4	Rockfon® System T15 A™	38%		3.62	4.6
	1200 x 600 x 20		Rockfon® System T15 A™				
 A24	600 x 600 x 20	3.4	Rockfon® System T24 A™	38%		3.62	4.6
	1200 x 600 x 20		Rockfon® System T24 A™				
 E24	600 x 600 x 20	3.4	Rockfon® System T24 E™	38%		3.62	4.6
 X	600 x 600 x 22	3.7	Rockfon® System T24 X™	38%		3.56	4.62
	1200 x 600 x 22		Rockfon® System T24 X™				

MS - Minimum Suspension

Contact us for specific dimensions, other edge types, lead times and minimum order quantities.


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 0,95 (Class A)

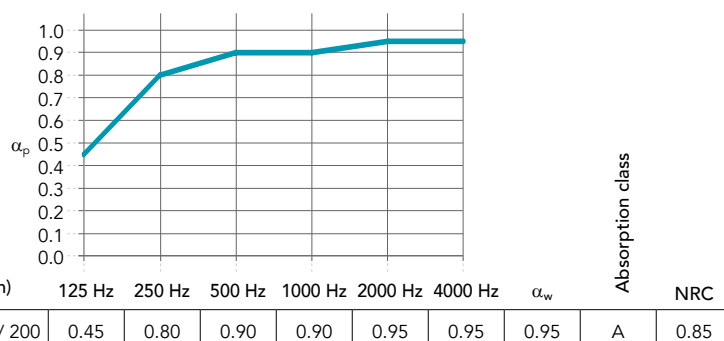

Reaction to fire
 A2-s1,d0



Light reflection
 Colour-dependent



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1).



Material Health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

09.2024 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

