

Rockfon® Eclipse wall panel



Rockfon® Eclipse wall panel








- Aesthetic, frameless acoustic wall panel suitable for offices, reception areas etc. where extra absorption combined with nice design is needed
- A smooth, deep-matt, and super-white surface providing high light reflection, light diffusion and anti-static properties, extending product lifetime
- Available in a variety of shaped formats with a clean minimalistic A-edge and an unlimited custom colour range using NCS
- Quick and easy to install with the special wall fixing kit. The fixing kit allows for the absorber to be installed in different distances from the wall creating interesting patterns

Product Description

- Stone wool panel
- Visible side: smooth, deep matt, super-white painted fleece
- Rear side: white backing fleece
- Durable painted edges

Application Areas

- Office
- Leisure
- Retail

Edges	Shapes	Module size (mm)	Weight (kg/unit)	MS / MS Easy Access (mm)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A	Square 	1160 x 1160 x 40	9	55 / 105	Rockfon® System Eclipse Wall	39%	Silver	6.46	8.37
	Rectangle 	1760 x 1160 x 40	13	55 / 105	Rockfon® System Eclipse Wall				
	Circle 	800 x 800 x 40	3	55 / 105	Rockfon® System Eclipse Wall				
		1160 x 1160 x 40	7	55 / 105	Rockfon® System Eclipse Wall				
	Triangle 	1160 x 1005 x 40	4	55 / 105	Rockfon® System Eclipse Wall				
	Hexagon 	1160 x 1006 x 40	6	55 / 105	Rockfon® System Eclipse Wall				

Contact us for the fixation of free-form Rockfon Eclipse.
 Free-form sizes bigger than 2400 length or 1200 width will be produced as two halves.
 Contact us for special shapes, colours, sizes, lead times and minimum quantities.

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.




Performance



Sound absorption
 A_{eq} (m²/item)

Further acoustic data available; contact your local Rockfon technical support

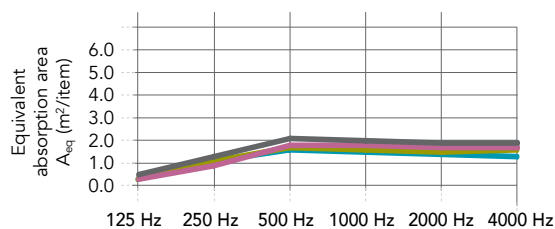

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz
Circle 1160mm, Direct Fixing Bracket (15 mm)	0.3	1.1	1.6	1.5	1.4	1.3
Circle 1160mm, Stepped Fixing Bracket (65 mm)	0.3	1.1	1.7	1.6	1.5	1.6
Square 1160x1160mm, Direct Fixing Bracket (15 mm)	0.3	0.9	1.8	1.8	1.7	1.7
Square 1160x1160mm, Stepped Fixing Bracket (65 mm)	0.5	1.3	2.1	2.0	1.9	1.9



Reaction to fire
 A1



Light reflection
 87% light reflection (rear side: 79%)
 >99% light diffusion



Visual appearance
 Super-white surface
 L value: 94.5
The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light
 Gloss: 0.8 gloss unit at 85° angle
The gloss of the product is tested in accordance with ISO 2813.



Humidity and sag resistance
 Up to 90% RH
 Rockfon Eclipse is not suitable for use in swimming pools or outdoors.
 For more information, please contact Rockfon.



Cleaning
 - Vacuum
 - Damp cloth



Hygiene
 Stone wool provides no sustenance to microorganisms



Surface durability
 Enhanced durability and dirt resistance.

Wet-scrub resistance: Class 4

The wet-scrub resistance is tested in accordance with EN ISO 11998:2006 and rated following EN 12720:2009+A1:2013 scale going from 1 to 5, where 5 is the best.



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

All performance properties presented in the datasheet are based uniquely on the Rockfon Blanka surface. All colours can influence product performances.

Please contact Rockfon customer service for more information.

Rockfon production facilities are certified according to the ISO 9001 and ISO 14001 management systems standards.

Sounds Beautiful

