

Rockfon® Koral



Rockfon® Koral






- Aesthetic white, micro-textured surface
- Class A sound absorption and highest fire safety (Class A1)
- Full range of formats in semi-concealed and visible grid options
- Surface can be cleaned with a damp cloth or vacuumed

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Painted edges

Application Areas

- Office
- Healthcare
- Education
- Leisure
- Retail

Edges	Module size (mm)	Weight (kg/m ²)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A15	600 x 600 x 15	2.0	Rockfon® System T15 A	39%	Silver	2.24	2.73
	1200 x 600 x 15		Rockfon® System T15 A				
	600 x 600 x 20	2.3	Rockfon® System T15 A			2.55	3.19
	1200 x 600 x 20		Rockfon® System T15 A				
 A24	600 x 600 x 15	2.0	Rockfon® System T24 A	39%	Silver	2.24	2.73
	1200 x 600 x 15		Rockfon® System T24 A				
	600 x 600 x 20	2.3	Rockfon® System T24 A			2.55	3.19
	1200 x 600 x 20		Rockfon® System T24 A				
 E15	600 x 600 x 15	2.2	Rockfon® System T15 E	39%	Silver	2.19	2.82
	1200 x 600 x 15		Rockfon® System Ultraline E				
			Rockfon® System T15 E				
	600 x 600 x 20		Rockfon® System Ultraline E				
			Rockfon® System T15 E				
600 x 600 x 20	Rockfon® System Ultraline E						
 E24	600 x 600 x 15	2.2	Rockfon® System T24 E	39%	Silver	2.19	2.82
	1200 x 600 x 15		Rockfon® System T24 E				
	600 x 600 x 20		Rockfon® System T24 E				


* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 0.95 (Class A)

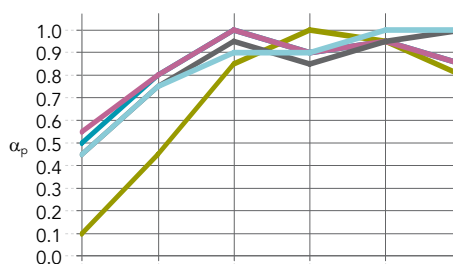

Edge / Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A: 15 / 200	0.50	0.80	1.00	0.90	0.95	0.85	0.95	A	0.90
A: 15 / 50	0.10	0.45	0.85	1.00	0.95	0.80	0.75	C	0.80
A: 20 / 200	0.55	0.80	1.00	0.90	0.95	0.85	0.95	A	0.90
E: 15 / 200	0.45	0.75	0.95	0.85	0.95	1.00	0.95	A	0.90
E: 20 / 200	0.45	0.75	0.90	0.90	1.00	1.00	0.95	A	0.90



Reaction to fire
 A1



Recyclability
 Fully recyclable stone wool



Light reflection
 86%



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Humidity and sag resistance
 Representative products from Rockfon's portfolio have been tested to ASTM C367.
 No visible deflection in high humidity.
 Up to 100% RH.
 C/0N



Cleaning
 - Vacuum
 - Damp cloth



Material health
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.



Hygiene
 Stone wool provides no sustenance to microorganisms

Sounds Beautiful

