

DATASHEET

Rockfon Sonar® Activity



Sounds Beautiful

Rockfon Sonar® Activity





- Designed for classrooms and open plan offices where speech intelligibility is crucial and noise and activity levels are very high
- Comes with an aesthetic white, micro-textured surface and high sound absorption when installed both suspended and direct
- Wide range of dimensions in concealed, semi-concealed and visible grid options
- Easy to clean with a vacuum and damp cloth

Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Durable painted edges

Application Areas

- Office
- Education
- Leisure

Edge detail	Module size (mm)	Weight (kg/m ²)	Recommended installation System	Recycled content	Cradle to Cradle Certified®	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	600 x 600 x 40	3.3	Rockfon® System T24 A™	37%		3.35	4.26
	1200 x 600 x 40		Rockfon® System T24 A™				
 B	600 x 600 x 40	6.4	Rockfon® System B Adhesive™	38%		4.5	6.58
	1200 x 600 x 40		Rockfon® System B Adhesive™				

Other dimensions are available on request. Please contact Rockfon.

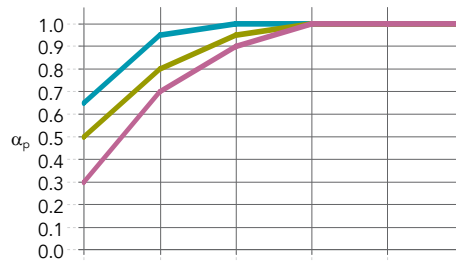
* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



Performance



Sound absorption
 α_w : up to 1,00 (Class A)



Edge / Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
A: 40 / 200	0.65	0.95	1.00	1.00	1.00	1.00	0.95	A	1.00
Other edges: 40 / 200	0.50	0.80	0.95	1.00	1.00	1.00	1.00	A	0.95
Other edges: 40 / 40	0.30	0.70	0.90	1.00	1.00	1.00	0.95	A	0.90



Reaction to fire
 A1



Light reflection
 85 %



Humidity and sag resistance
 Up to 100% RH.
 No visible deflection in high humidity
 C/0N



Cleaning

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide



Hygiene
 Stone wool provides no sustenance to microorganisms



Clean Room
 ISO Class 5



Thermal insulation
 Thermal conductivity:
 $\lambda_D = 40 \text{ mW/mK}$
 Thermal resistance:
 $R = 1,00 \text{ m}^2\text{K/W}$



Recyclability
 Fully recyclable stone wool



Indoor environment
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material Health
 All materials used in Rockfon products are screened against the technical checklist A20 and the list of substances restricted under REACH and do not contain substances of very high concern (SVHC). Rockfon stone wool fibres comply with safe fibre EU regulation and hold a EUCEB certification.

Sounds Beautiful

