

DATASHEET

# Rockfon Sonar® Activity



**Sounds Beautiful**

# Rockfon Sonar® Activity




- Designed for classrooms and open plan offices where speech intelligibility is crucial and noise and activity levels are very high
- Comes with an aesthetic white, micro-textured surface and high sound absorption when installed both suspended and direct
- Wide range of dimensions in concealed, semi-concealed and visible grid options
- Easy to clean with a vacuum and damp cloth

## Product Description

- Stone wool tile
- Visible side: micro-textured white painted fleece
- Rear side: back fleece
- Durable painted edges

## Application Areas

- Office
- Education
- Leisure

Edges	Module size (mm)	Weight (kg/m <sup>2</sup> )	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*	A1-C4 Full life cycle impact (kg CO <sub>2</sub> eq/m <sup>2</sup> )*
 A24	600 x 600 x 40	3.3	Rockfon® System T24 A	38%	Silver	3.35	4.26
	1200 x 600 x 40		Rockfon® System T24 A				
 B	600 x 600 x 40	6.4	Rockfon® System B Adhesive	38%	Silver	4.5	6.58
	1200 x 600 x 40		Rockfon® System B Adhesive				

Other dimensions are available on request. Please contact Rockfon.


\* For full environmental impact disclosure, see our product EPDs available on [rockfon.link/apac-epd](https://rockfon.link/apac-epd). Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.



## Performance



**Sound absorption**  
 $\alpha_w$ : up to 1,00 (Class A)

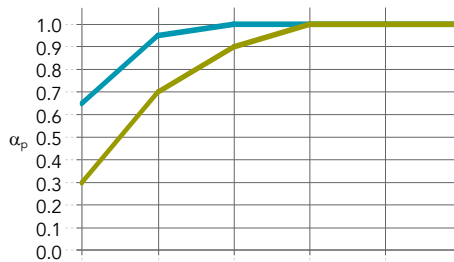

Edge / Thickness (mm) /  
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	$\alpha_w$	Absorption class	NRC
A: 40 / 200	0.65	0.95	1.00	1.00	1.00	1.00	1.00	A	1.00
Other edges: 40 / 40	0.30	0.70	0.90	1.00	1.00	1.00	0.95	A	0.90



**Reaction to fire**  
 A1



**Light reflection**  
 85 %



**Humidity and sag resistance**  
 Representative products from Rockfon's portfolio have been tested to ASTM C367.  
 No visible deflection in high humidity.  
 Up to 100% RH.  
 C/0N



**Cleaning**

- Vacuum
- Damp cloth
- Chemical resistance: resistant to diluted solutions of ammonia, chlorine and hydrogen peroxide



**Hygiene**  
 Stone wool provides no sustenance to microorganisms



**Clean room**  
 ISO Class 5



**Thermal insulation**  
 Thermal conductivity:  
 $\lambda_D = 40 \text{ mW/mK}$   
 Thermal resistance:  
 $R = 1,00 \text{ m}^2\text{K/W}$



**Recyclability**  
 Fully recyclable stone wool



**Indoor environment**  
 Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



**Material health**  
 All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

05.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

# Sounds Beautiful

