

DATASHEET

Rockfon VertiQ®



Sounds Beautiful

Rockfon VertiQ®





- Attractive and impact resistant, highly sound-absorbent acoustic wall panels (Class A) suitable for class rooms, sports activity areas and offices
- Panels can be installed full height, either horizontally or vertically with no limits to wall dimensions, providing numerous design possibilities
- Available in four colours - white, light grey, grey and black

Product Description


- Stone wool panel
- Visible side: durable fine woven surface
- Rear side: back fleece
- Painted edges

Application Areas

- Education
- Healthcare
- Industry
- Office
- Leisure

Edges	Module size (mm)	Weight (kg/m ²)	Recommended installation System	Recycled Content	 Full Scope - V 4.0	A1-A3 Production stage impact (kg CO ₂ eq/m ²)*	A1-C4 Full life cycle impact (kg CO ₂ eq/m ²)*
 A24	1200 x 1200 x 40	5.2	Rockfon® System VertiQ® T24 A Wall	51%	Silver	4.66	6.12
	2700 x 1200 x 40		Rockfon® System VertiQ® T24 A Wall				
 A HAT	1200 x 1200 x 40	5.2	Rockfon® System VertiQ® HAT A Wall	51%	Silver	4.66	6.12
	2700 x 1200 x 40		Rockfon® System VertiQ® HAT A Wall				
 C	2400 x 600 x 40	6.4	Rockfon® System VertiQ® C Wall	51%	Silver	4.66	6.12

* For full environmental impact disclosure, see our product EPDs available on rockfon.link/apac-epd. Due to differences in calculation methods and scenario assumptions, environmental impact values are generally not directly comparable between manufacturers.

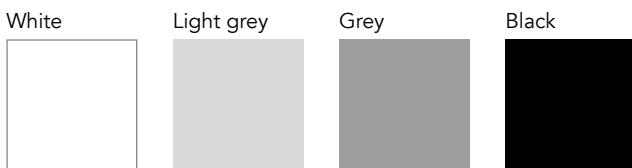




Performance



Sound absorption
 α_w : 1.00 (Class A)

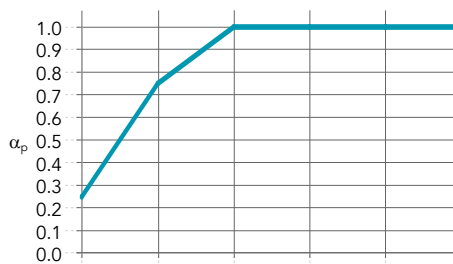

Edge / Thickness (mm) /
 Suspension (incl. tile - mm)

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	α_w	Absorption class	NRC
VertiQ A, C: 40 / 40	0.25	0.75	1.00	1.00	1.00	1.00	1.00	A	1.00



Reaction to fire
 A2-s1,d0



Light reflection
 White 72%
 Lightgrey 61%
 Grey 33%
 Black 5%



Humidity and sag resistance

Up to 100% RH
 VertiQ C in Rockfon System VertiQ C Wall can be used in swimming pools provided it is not exposed to condensation, splashing water or water droplets. For more information, please contact Rockfon.



Cleaning
 - Vacuum



Hygiene
 Stone wool provides no sustenance to microorganisms



Impact Resistance

The woven surface of Rockfon VertiQ panels provides enhanced resistance to perforation, tested in accordance with NF P 08-301.



Recyclability

Fully recyclable stone wool



Indoor environment

Rockfon ceiling products are classified in Class E1 in accordance with EN 13964 (EN 717-1). Rockfon ceiling products have a very low release of VOCs. A selection of Rockfon products have achieved the following performance levels and labels in indoor air emissions:



Material health

All materials used in Rockfon products are screened against the list of substances restricted under REACH or recognized as Substances of Very High Concern (SVHC) on an ongoing basis. Rockfon stone wool fibres comply with the safe fibre EU regulation and hold an EUCEB certification.

05.2026 | All colour codes mentioned are based on the NCS - Natural Colour System® property of and used on license from NCS Colour AB, Stockholm 2012 or the RAL colour standard. Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.

Sounds Beautiful

